




NSK bearing Trading Co., Ltd

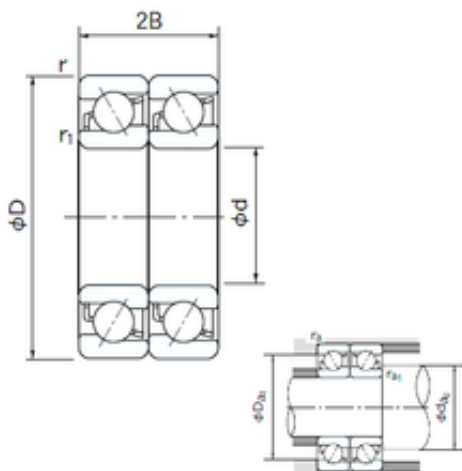

40 mm x 90 mm x 23 mm 40 mm x 90 mm x 23 mm NACHI 7308CDT angular contact ball bearings

Bearing No. 7308CDT

7308CDT Bearing 2D drawings and 3D CAD models

Size	40x90x23 mm
Bore Diameter	40 mm
Outer Diameter	90 mm
Width	23 mm
d	40 mm
D	90 mm
B	23 mm
C	23 mm
Angle (°)	15 °
a -	4.0 mm
r min.	1.5 mm
r1 min.	1 mm
2B	46 mm
da min.	49 mm
Da max.	84.6 mm
ra max.	1 mm
Weight	0.655 Kg
Basic dynamic load rating (C)	80,5 kN
Basic static load rating (C0)	65,5 kN
(Grease) Lubrication Speed	9600 r/min
Bore Type	Cylindrical Bore
Enclosure	Open
Configuration	Duplex
Bore Size	40 mm



NSK bearing Trading Co., Ltd

Outside Diameter	90 mm
Width	23 mm
Fillet Radius/Chamfer	1.5 mm
r1	1 mm
Dynamic Load Rating	80,500 N
Static Load Rating	65,500 N
Limiting Speed - Grease	9,600 rpm
Limiting Speed - Oil	13,000 rpm
da1 (min)	49 mm
da2 (min)	49 mm
Da1 (max)	81 mm
Da2 (max)	84.6 mm
ra (max)	1.5 mm
ra1 (max)	1 mm